


POWERPLAY II

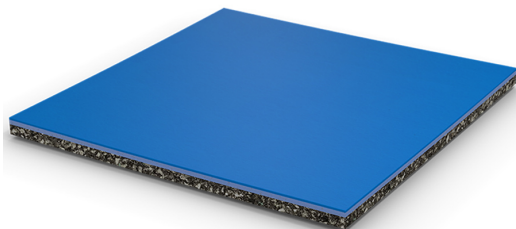

Prefabricated multi-layer sports floor for indoor use with rubber surface, fully PVC-free, with a **total constant thickness of 7,8 mm**, supplied in 190 cm wide rolls.

The 3,0 mm thick upper layer, consisting of natural and synthetic rubber, calendered and vulcanized, is composed of 1 mm thick wear layer, mass-colored with solid colour or tone-on-tone marbled effect, vulcanized to a 2 mm thick load-bearing underlayer, and it contains at least 20% of raw materials classified as recycled, recovered or as by-products.

The non-porous, smooth, matt and anti-glare surface has a surface hardness of no less than 85 Shore A, according to ISO 7619-1, and is protected by a factory-applied dual tech coating (UV+Laser) with silky matt effect called PRO2,

which ensures ultra matt effect (specular gloss <10%), enhanced durability, easier cleaning and lower maintenance, versatility for multipurpose and intensive use, constant and uniform friction, and excellent adhesion of the most common paint types without any preliminary treatment.

The surface also has excellent natural antibacterial characteristics, without the addition of biocidal ingredients inside the product: in tests carried out according to ISO 22196, the killing of inoculated bacteria exceeds 99,999% in 24 hours, with an antimicrobial activity factor "R" greater than 5.

The 4,8 mm thick underlayer is made of expanded polyurethane foam, modulated to ensure technical requirements such as resistance to impact, force reduction, elasticity and sound absorption.

This product is ideal for a multisport indoor hall where different indoor sport competitions are held, such as basketball, handball, volleyball, badminton or futsal.

The mechanical properties of the surface and the excellent resistance to indentation (≤ 0.1 mm according to UNI EN 1516) make the flooring also suitable for non-sports use (schools, meetings, events, etc.) with tables and chairs.

The flooring contains at least 46% of raw materials classified as recycled, recovered or as by-products.

STANDARDS

This product has been certified to be in compliance with the European Standard EN 14904 ("Surfaces for sports areas - Multi-sports floor systems for indoor use", Shock absorption $\geq 25\%$, Class P1) including Declaration Of Performance (DoP, CE marking) and it is rated Euroclass Bfl-s1 in accordance with the EN 13501.

This product has been tested in accordance with European Standard EN 13501 in external laboratory also on top of a vinyl or rubber resilient flooring of 2 to 10 mm thickness and rated fire Euroclass Bfl-s1.

This product has been rated "Non Hazardous" by external laboratory in accordance with the European Waste Catalogue. This means that it does not present a subrisk to public health or cause adverse effects on the environment.

This product has been certified in compliance with the following schemes and standards for Indoor Air Quality programs (VOC, Volatile Organic Compounds emissions):

- Greenguard and Greenguard Gold (UL Certification Program).
- French scope (2011-321): Class A+.
- Italian regulation CAM (Minimum Environmental Criteria) following D.M. 11/24/2025.



- Environmental Product Declaration (EPD).

This product complies with the applicable requirements of REACH (Registration, Evaluation, Authorisation and Restriction of Chemicals) Regulation (CE 1907/2006), including SVHC (Substances of Very High Concern) obligations and Annex XVII restrictions, including PAHs (Polycyclic Aromatic Hydrocarbons), as well as Regulation (EU) 2019/1021 on Persistent Organic Pollutants (POPs). The product is not intentionally formulated with PFAS (Per- and Polyfluoroalkyl Substances).

Furthermore, where applicable, it meets the requirements of the Italian Minimum Environmental Criteria (CAM) concerning recycled content, volatile organic compound (VOC) emissions, and the absence of restricted or hazardous flame retardants.

This product, of European origin, is designed and manufactured in Italy and it's supplied by an ISO 50001, ISO 9001:2015, ISO 14001:2015 and ISO 14064 certified company.

CERTIFICATIONS

Available International Sport Federation certificates for this product:

FIBA Certificate of Approval for Synthetic Flooring Category, Competition Level 2

FIFA QUALITY PROGRAMME FOR FUTSAL SURFACES - Report n 140982

COLOR RANGE



AC61 MAPLE



AC62 OAK



AC25 ROYAL BLUE



AC28 BLUE GRAY



AC23 OCEAN BLUE



AC10 GRASS GREEN




AC17 LIME




AC08 GOLD




AC40 ORANGE




AC41 PINK




AC30 RED




AC34 MAHOGANY



AC26 GREY



AC71 DARK



AC00 BLACK

This color range is to be used as a guideline only.

INSTALLATION AND MAINTENANCE

The product must be stored and installed in appropriate conditions, including suitable protected premises at guaranteed minimum and maximum temperatures and humidity, as fully described in MONDO's *Storage and Installation Instructions*.

The product must be used and maintained following the premises described in MONDO's *Use and Maintenance Instructions*.

30/06/2026

Mondo keeps the right to modify the characteristics of the products in any moment

www.mondoworldwide.com p. 2/3

CE EN 14904:2006





This product can be installed loose-laid without adhesive onto the concrete subfloor, thanks to the excellent dimensional stability.

DIMENSIONS

Thickness	Length	Width	Weight
7,8 mm	14,2 m	190 cm	6,2 kg/m ²

For additional product information, please refer to the Technical Data Sheet.